

Date of publication XXXXX 00, 20xx, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.20xx.DOI

Research Trends in Network-Based Intrusion Detection Systems: A Review

SATISH KUMAR¹, SUNANDA GUPTA² AND SAKSHI ARORA³

¹School of Computer Science and Engineering, Shri Mata Vaishno Devi University, Katra, Jammu-182320, India (e-mail: 16dcs005@smvdu.ac.in)

²School of Computer Science and Engineering, Shri Mata Vaishno Devi University, Katra, Jammu-182320, India (e-mail: sunanda.gupta@smvdu.ac.in)

³School of Computer Science and Engineering, Shri Mata Vaishno Devi University, Katra, Jammu-182320, India (e-mail: sakshi.arora@smvdu.ac.in)

Corresponding author: Satish Kumar (e-mail: krsk23@gmail.com).

ABSTRACT Network threats and hazards are evolving at a high-speed rate in recent years. Many mechanisms (such as firewalls, anti-virus, anti-malware, and spam filters) are being used as security tools to protect networks. An intrusion detection system (IDS) is also an effective and powerful network security system to detect unauthorized and abnormal network traffic flow. This article presents a review of the research trends in network-based intrusion detection systems (NIDS), their approaches, and the most common datasets used to evaluate IDS Models. The analysis presented in this paper is based on the number of citations acquired by an article published, the total count of articles published related to intrusion detection in a year, and most cited research articles related to the intrusion detection system in journals and conferences separately. Based on the published articles in the intrusion detection field for the last 15 years, this article also discusses the state-of-the-arts of NIDS, commonly used NIDS, citation-based analysis of benchmark datasets, and NIDS techniques used for intrusion detection. A citation and publication-based comparative analysis to quantify the popularity of various approaches are also presented in this paper. The study in this article may be helpful to the novices and researchers interested in evaluating research trends in NIDS and their related applications.

INDEX TERMS Citation, Machine Learning, Bio-inspired, Intrusion Detection System, NIDS, Datasets

I. INTRODUCTION

TODAY'S era is of information and communication, and the numbers of host/terminal are continuously increasing in the scenario of computer networking. Vulnerabilities in security systems and unauthorized access to information systems are also growing tremendously. Many techniques, namely firewalls, access control, anti-virus, anti-malware software, application security, behavioral analytic, data loss prevention, distributed denial of service (DDoS) prevention, and network segmentation are commonly used in the computer world to promote internet security mechanisms due to their capabilities of content filtering, blocking data outflow, and alerting and preventing malicious activities. Firewalls and spam filters are generally used with simple rules-based algorithms to allow and denial of the protocols, port, or IP addresses. But the drawback of these firewalls and filters is that sometimes they are unable to control complex attacks of DoS (denial of service) types, and they are also not capable of making the differences between 'good traffic' and 'bad traffic'. An intrusion detection system with anti-virus has a significant impact on computer network security mechanisms

that provides a more prominent scenario for protecting a computer network from the unauthenticated access control service. In the perspective of information systems, intrusion refers to any attempt that compromises the integrity, availability, confidentiality, or bypasses the security mechanism in a computer or a network [1].

According to the National Institute of Standard and Technology (NIST), intrusion detection is the process of monitoring events occurring in a computer system or a network and analyze these events for a sign of intrusions. The monitoring processes can be accomplished with software or hardware to secure the system from malicious activity or escape integrity policies that are being violated. The IDS performs the intrusion detection process to secure a computer or network. It provides a more prominent scenario for protecting a computer network from the unauthenticated access control service.

The IDS can be categorized into three categories on the installation basis in the system- Host-based IDS (HIDS), Network-based IDS (NIDS), and Hybrid IDS. HIDS are deployed on a single host. In HIDS, attacks are detected

from a single computer system, and the essential files of the operating system are analyzed. Hence, these types of attacks are usually easy to detect except for some in-filtered malware which is very hard to detect. In a NIDS, malicious information is detected from the diverse interconnection of computers, and NIDS are deployed on routers or switches in a network. Whereas, hybrid IDS can be deployed on hosts as well as on the network. The primary goal of NIDS is to identify malicious or threatened logging information and report to the network manager about this malicious information.

An intrusion detection system usually does not prevent the system from intrusion attack; rather than it merely generates an alarm after detecting an attack in the system in real-time or before the arrival of the attack on the target. It is also equally vital to cause notice of an attack after the happening of that attack in the system because an IDS maintains and updates an intrusion profile in the log. The operating system must also uphold various activities that require excess disc space and central processing unit (CPU) resources for analysis of logs. Managing the logs formats and comparing these formats with identified attack patterns according to security violation issues is also a big challenge in the IDS [2].

The literature regarding intrusion detection systems for a network does not provide the research trend, popularity of the datasets used evaluation of a NIDS model, and the popularity of different intrusion detection approaches. The research articles taken for research review are usually not based on any qualitative measure. They are chosen arbitrarily. But we took citation as a measure to quantify the popularity and research trend in research articles.

Citation is a measure to identify the popularity of a research article. According to Linda in [3], citation is the number of times that the other authors mention a research article in his/her work/s. The citation of an article is a quantitative and qualitative measure to recognize the popularity of a research article and an institution. Citation also provides the trend of research in a specific field.

We want to determine the research trend and popularity in intrusion detection based on various approaches and methodologies. Citation belonging to a published article is used to explore the research trend regarding that article. Citation is a valuable and popular scale to measure the research trend in a field [3]. There are various search engines like Google Scholar, Web Science, Microsoft Academic, Semantic Scholar that record citations of an article. Citation and article publication count regarding an article on a research topic is considered a research trend and popularity related to that particular research topic. Citation to an article (say A) is the total number of references of an article (A) that the other articles include this references to A into their work. But no search engine or database provides research trends on a search field/topic along with the different used approaches. The current article focuses on research trends in the field of IDS, its related techniques, datasets, total publications, and other citation-related analysis. We considered the related articles to IDS from 2005 to 2020. The major contribution of

this article is outlined as follows

- 1) To compare several popular IDS, which are being used commercially for network security.
- 2) To analyze the popularity of various datasets to evaluate a NIDS.
- 3) To find out the popularity of different approaches and methodologies used in the intrusion detection system.
- 4) To analyze most cited articles published in journals and conferences in a fast and easy manner.
- 5) To analyze various performance metrics used to evaluate an intrusion detection system

In the past decades, academic search engines and bibliographic databases (ASEBDs) comparison has been widely investigated [4], [5]. A comparative analysis of various academic databases and search engines have also been shown in [6] and [7]. Microsoft Academic Search (MAS) follows semantic search in which the search engine does not only match the keywords to content; instead focuses on their meaning with a broader scope and coverage as compared to Web of Science, Scopus and Google Scholar [4], [5], [8]. It helps searchers by providing some entries and interesting topics when they are unsure about searching string. MAS also supports searching based on journals, conferences, institutions, and authors in different fields for finding the best search results. The total number of publications records by Microsoft Academic in [9] is 247,389,875, 261,445,825 authors, 743,427 topics, 4,523 Conferences, 48,974 Journals, and 25,811 Institutions. The total number of estimated citation pairs is 2,390,820,943. In the same vein, a total of 36,765 publications with 592,675 citations are observed in the IDS field. So, Microsoft Academic [9] has been used for taking the records of citations that use a search string to achieve the goal of this paper.

The rest of the paper is organized accordingly. Section II deals with related work in the field of research trends in intrusion detection. Section III discusses the method applied for finding the citation and related articles and other corresponding reviews. Network intrusion detection system, its modules, widespread causes of intrusion in a network, some popular NIDS, and their analysis presented in Section IV. Section V shows different benchmark datasets and their citation analysis-based records. A study related to various methodologies used for intrusion detection in a network is given in Section VI. Section VII is regarding the performance metrics used to evaluate a network intrusion detection model. Section VIII explores the discussion on the result of our present study. Finally, Section IX presents the conclusion.

For clarity, we explain some abbreviations and their corresponding acronym commonly used in this paper. In the KDD'99 dataset, KDD stands for Knowledge Discovery in Database, 1999. NSL in NSL-KDD dataset stands for Network Security Laboratory. ISCX is the acronym for Information Security Centre of Excellence which is one of the leading institutions in the area of information and communication security, in collaboration with the Atlantic Canada Oppor-

tunities Agency (ACOA). CIDDS is abbreviated for Coburg Intrusion Detection Data Sets. UNSW-NB15 stands for the University of New South Wales Network-Based dataset, 2015. SSENNet stands for self-supervised scale equivalent network Dataset. KNN means K-Nearest Neighbors which is a supervised learning algorithm. SVM stands for support vector machine which is also supervised learning that is used for classification as well as regression problems. PCA is denoted for principal component analysis.

II. RELATED WORK

During the last decade, several surveys of intrusion detection have been conducted. One of the earliest was presented by Matt Bishop in [10] about trends in vulnerabilities analysis and intrusion detection. According to Matt Bishop, trends in intrusion detection are infrastructure-based protocols and techniques required to design and develop intrusion detection systems.

Another popular survey by Kabiri & Ghorbani in [11] presented trends in Intrusion Detection Systems (IDS) and also analyzed some problems regarding intrusion detection. A traditional IDS faces challenges like, time consumption, log-file updating, statistical and rule-based analysis, and accuracy. The survey presented in this article is based on intrusion detection along with AI, embedded programming, agent-based IDS, and software engineering.

Zamani & Movahedi in [12] presented a review article based on some influential algorithms based on machine learning approaches used in intrusion detection. Zamani explored that using a machine learning approach for intrusion detection enables a high detection rate and low false-positive rate with the capabilities of quick adaptation toward changing intrusive behavior. The analyzed algorithms in this review paper have been categorized into artificial intelligence and computational intelligence bases.

Agrawal & Agrawal in [13] surveyed various data mining techniques for intrusion detection. Various machine learning techniques, individually or in hybrid form have been widely used not only in the field of clustering or classification but also for reducing the dimensionality and feature selection of IDS.

Ahmed et al. in [14] presented the challenges regarding the datasets which are being used for IDS Model. This survey was based on the categories of IDS namely; classification, statistical, information theory, and clustering.

In the present scenario, the statistical method extended with new methods based on bioinspired approaches. These methods are mainly based on the evolutionary theory or swarm intelligence method [15]. For finding the suitable and best-fit selection of bio-inspired algorithms, various characteristics like Convergence, Intensification, diversification, CPU time, etc. are to be analyzed.

Audrey A. Gendreau in [16] represented a survey of Intrusion Detection Systems towards an End to End Secure Internet of Things (IoT) and this survey of the Intrusion Detection Systems (IDS) use the most recent ideas and methods

to propose the present IoT. To understand and illustrate IDS platform differences and the current research trend towards a universal, cross-platform distributed approach has been taken into consideration.

Hamid et al. in [17] provided a review of the benchmark datasets available for researchers in the field of intrusion detection that are used to train and test their models. The review on various datasets namely; DARPA 98, KDD'99, NSL-KDD, UNM-Dataset, UNSW-NW15, Caida Distributed denial of Service (Caida DDoS) Dataset, Australian Defense Force Academy Window Dataset (ADFA-WD), provided the details of classes, attributes, and instances.

Most recently, Misra et al. in [18] also proposed a detailed investigation and analysis using machine learning approaches for intrusion detection. This survey depends on the categorization of the classifiers into four categories viz-a-viz single classifiers with all features in the dataset, the single classifier with selected features of the dataset, multiple classifiers with all features of the dataset, multiple classifiers with selected features of the dataset. This analysis also reveals that a well-performing intrusion detection approach for one type of attack, may not be a well-perform for the other types of attacks.

All the literature discussed so far, does not focus on the research trend and popularity in NIDS based on some quantitative measure bases. However, in this article, we analyze various commercially used IDS, the popularity of various benchmark datasets, and the recent trends in the used approaches in intrusion detection. The analysis performed in the article is based on quantitative measures instead of qualitative measures.

III. METHODS

Researchers are more attracted to articles that have a high citation. So, we have taken citations as metrics that provide a standard and validity of a research topic/journal publications in a research area. The string-based searching in Section III took research articles from the year 2005 to 2020.

Following the network intrusion detection model, keywords related to intrusion detection systems, anomaly detection bio-inspired algorithms are used in the 'Microsoft Academic' advance search. At the same time, terminologies related to the intrusion detection system, datasets, methodologies, and issues are utilized. The searching string for datasets and approaches with their sub-classes are tabulated in Table 1. The description for various datasets are described in the Table 3

The publications for various approaches implemented in intrusion detection systems are analyzed based on the searching strings related to intrusion detection systems using filters searched between the years 2005 to 2020. The filters are used as 'intrusion detection system', and, 'oldest first' citations for searching. The searching strings for the performance metrics are also filtered by top topics as 'False positive rate', 'True positive rate', and 'F1 score'. The filters used are the same for both; for the complete publication analysis and the citation

TABLE 1. The searching string on which research articles from the year 2005 to 2020 are chosen

Searching base	Searched strings
Datasets	"KDD Cup'99" + "intrusion detection", "NSL-KDD" + "intrusion detection", "Kyoto 2006" + "intrusion detection", "UNSW-NB15" + "intrusion detection", "SSENet" + "intrusion detection", "ISCX" + "intrusion detection", and "CIDD5" + "intrusion detection".
Approaches used in IDS	<p>"Statistical based" + "Intrusion detection", "Knowledge based" + "Intrusion detection", "Machine Learning Based" + "intrusion detection", and "Bio-inspired based" + "Intrusion detection"</p> <p>Statistical-based NIDS approaches</p> <p>"Univariate" + "intrusion detection", "Multivariate" + "intrusion detection", "Time series" + "intrusion detection"</p> <p>Knowledge-based NIDS approaches</p> <p>"finite state machine" + "intrusion detection" "FSM" + "intrusion detection", "Description Language" + "Intrusion detection", "Expert System" + "Intrusion detection"</p> <p>Machine learning-based NIDS approaches</p> <p>"Linear regression" + "intrusion detection", "Logistic regression" + "intrusion detection", "Decision tree" + "intrusion detection", "K-mean" + "intrusion detection", "Neural network" + "intrusion detection", "KNN" + "intrusion detection", "SVM" + "intrusion detection" "support vector machine" + "intrusion detection", "Random forest" + "intrusion detection", "Bayesian Network" + "intrusion detection", "Markov Model" + "intrusion detection", "Fuzzy Logic" + "intrusion detection", "Principal component analysis" + "intrusion detection" "PCA" + "intrusion detection", "AdaBOOST" + "intrusion detection", "Gradient BOOST" + "intrusion detection", "clustering" + "intrusion detection" "outlier" + "intrusion detection"</p> <p>Bio-inspired-based NIDS approaches</p> <p>"Swarm" + "intrusion detection", "ecology-based" + "intrusion detection", "Evolutionary Algorithm" + "intrusion detection", "Genetic Programming" + "intrusion detection", "Genetic Algorithm" + "intrusion detection", "evolution strategy" + "intrusion detection", "ant colony" + "intrusion detection", "partial swarm" + "intrusion detection", "bee colony" + "intrusion detection", "fish swarm" + "intrusion detection", "firefly" + "intrusion detection", "bacterial foraging" + "intrusion detection"</p>
Performance measurements	<p>"Confusion matrix", "Receiver operating characteristic", "Confusion matrix" && "intrusion detection system", "Receiver operating characteristic" && "intrusion detection system", "misclassification rate" && "intrusion detection system", "Accuracy" && "intrusion detection system", "True positive rate" && "intrusion detection system" "recall" && "intrusion detection system" "sensitivity" && "intrusion detection system", "true negative rate" && "intrusion detection system" "Specificity" && "intrusion detection system", "Precision" && "intrusion detection system", "false positive rate" && "intrusion detection system", "Prevalence" && "intrusion detection system", "F-Score" && "intrusion detection system"</p>

analysis of different approaches used in intrusion detection. This analysis is based on the article publication records from the year 2005 to 2020. We are making published article records till 20th December 2020 to avoid day-by-day citation variations.


IV. NETWORK INTRUSION DETECTION

The concern about increasing security problems has been expressed by James P. Anderson in a paper [19], published in

1972. After that, in 1980, he outlined an audit base procedure for automated intrusion detection and monitoring processes for hosts [20]. From 1980 to 1990, the US government invested funds for many projects like network audit director and intrusion response (NADIR), Haystack, Multics intrusion detection and alerting system (MIDAS), and Discovery, etc. [21].

Zuech et al. in [22] explored that a NIDS helps the forensic process to identify the footprint of breaches. Attacks travel from one computer/node to another through routers and switches, and a NIDS observers network traffic data at the network layer. Based on pattern-matching of this network traffic data, the NIDS can be further categorized into Anomaly (Unknown)-Based or Misuse (Known) Based IDS. In anomaly detection, pattern base examination of traffic flow is implemented and deviation from normal pattern behavior leads to the inference of intrusive information. On the other hand, parametric examination of features and known signature for an attack is used to compare with a predefined set of rules for the detection of unauthorized action in misuse detection.

A year-wise analysis of the articles published regarding intrusion detection is shown graphically in Figure 1. Figure 1 depends on the number of research publications on intrusion detection systems from 1972 to 20th December 2020. It has been noticed that in the last three-decade, intrusion detection-related publications and research-related articles are continuously growing after the year 1998 with minor crest and troughs.

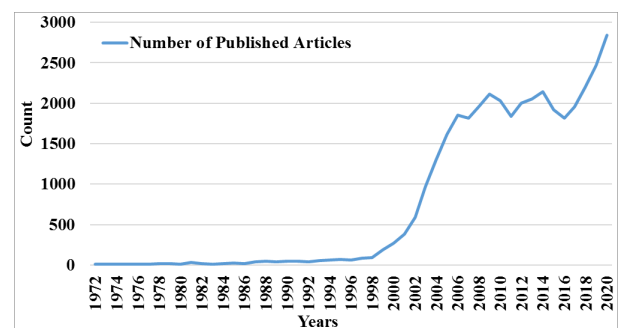**FIGURE 1.** Research publications on intrusion detection systems since year 1972 to 2020

A NIDS comprises different modules that are shown in Figure 2. These modules perform the detection process for intrusive information in a network. The three modules that comprise a NIDS with their function are shown in Figure 2. The detection machines module helps to detect intrusion or anomalies. The detection software performs detection strategies, and the management machine manages the detection strategies or policies. The other sub-modules of the detection machine module is the data capture module. The intrusion detection module and communication modules capture packets from the network. The second module of a traditional NIDS, Management Machine, is used for managing and

maintaining detection policies based on detection strategies. The database is the third module that maintains and stores recorded behavior of intrusion detection based on feature extraction. The most common issues faced by a NIDS are fidelity problems, resource usage, and reliability. Existing intrusion detection systems suffer from at least two of the problems defined by Hoque et al. in [23]. The various phases of the network intrusion detection model (NIDM) are shown graphically in Figure 2.

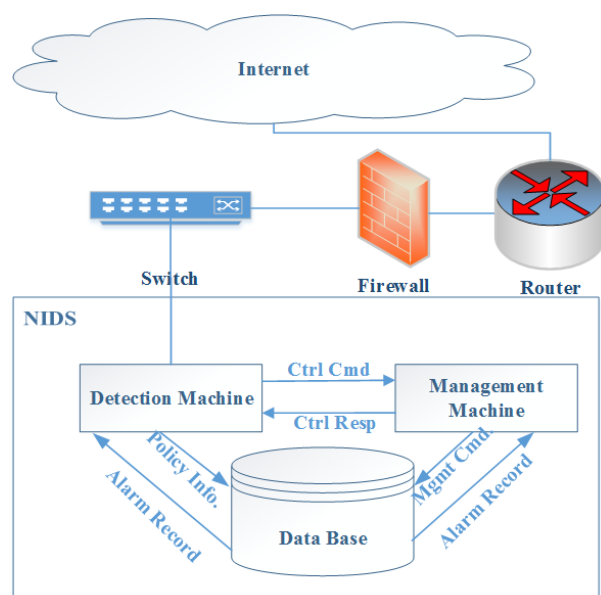


FIGURE 2. A Network-based intrusion detection system (NIDS) with its components

In Figure 2, Mgmt Cmd stands for management command, Ctrl Resp stands for control response, Ctrl Cmd represents control command, and Policy Info is abbreviated for policy information.

A. CAUSES OF INTRUSION IN NETWORK

Based on Anchugam & Thangadurai in [24] and Ghorbani et al. in [25], we observed some commonly occurred causes of intrusion in a network. These are as follows.

- Bad packets (produced from corrupt domain name system (DNS) data, software bugs) and local packets may not be detected significantly, which causes high false-alarm rates (false +ve).
- The encrypted packets may cause intrusion, which is not preventive without effective IDS.
- IDS may not effectively imply the identification and authentication for weak access in the network. When an attacker gains admittance due to a soft authentication mechanism, then IDS is preventive for the misconduct.
- NIDS systems can be subject to some protocol-based attacks, then hosts in that network may be vulnerable to illegal data, and Transmission Control Proto-

col/Internet Protocol (TCP/IP) stack attacks may be the reason for the crash of an NIDS.

B. COMPARISONS OF SOME POPULAR NIDS

There are many NIDS that are used commercially for network security purposes. Some popular NIDSs, in Table 2, are tabulated with their comparative analysis.

V. BENCHMARK DATASETS USED IN NIDS MODELS

Various datasets as benchmark datasets have been used to evaluate the intrusion detection model. The work done on the various datasets is to exhibit better classification accuracy, and detection rate [29]. There are many intrusion detection datasets published over the last few years. Finding a relevant dataset to evaluate an intrusion detection model is a tough job. Ring et al. in [30] explored a survey on existing datasets for network-based intrusion detection along with an analysis of their properties, attack scenarios, and relations between the datasets.

Here, regarding the popularity of various datasets, statistical comparison-based citations along with advantages and disadvantages of different benchmark datasets are tabulated in Table 3. Table 3 shows that the KDD Cup'99 dataset has the highest citation as a benchmark dataset since 2005. It means that the highest work has been done using the KDD Cup'99 as a benchmark dataset compared to the other datasets. The second most cited dataset is NSL-KDD, according to Table 3.

A newer dataset containing more modern attacks, such as the UNSW-NB15 dataset generated for the Australian Centre for Cyber Security [40] is also used as a benchmark dataset. This dataset comprises nine sorts of attacks and has a training set with one hundred seventy-five thousand records and a testing set with eighty-two thousand records. The hypertext transfer protocol (HTTP)-based dataset was generated for the CSIC (Consejo Superior de Investigaciones Científicas (Superior Council of Scientific Investigations)), Spanish Research National Council, in 2010 to report the criticisms of KDD'99 [25]. The dataset contains thirty-six thousand of which are 'normal' requests and more than twenty-five thousand anomalous. These datasets may be more applicable for specific cases; however, they are not as ubiquitous as KDD Cup'99 and NSL-KDD datasets. For demonstration of the benchmark datasets, KDD Cup'99 and NSL-KDD are ideal datasets since many papers describe their implementations specifically [41], [42] [43].


The year-wise distribution of various datasets is presented graphically in Figure 3. This graph shows that the KDD Cup'99 dataset has the highest popularity, followed by the NSL-KDD dataset from 2005 to 2018. Meanwhile, other datasets also came into existence.

VI. APPROACHES USED IN NIDS MODELS

Classical intrusion detection problem-solving methodologies, according to Liu & Lang in [2] and Jyothsna et al. in [44], introduced four branches based on methodologies:

TABLE 2. Popular commercially used intrusion detection systems

S. No.	NIDS	Manufactured	Approaches Used	Advantage
1	Snort: created by Martin Roesch, 1998 [26]	Cisco Systems, Sourcefire https://www.snort.org/	signature-based, network intrusion detection, pattern matching. Aho-Corasick algorithm [27].	Free open-source, Real-time alerting, and packet logging
2	OSSEC: Open-Source HIDS Security • Daniel B. Cid owned the copyrights of the OSSEC project, 2008.	AlienVault® OSSIM™, in 2008 • Currently maintained by Atomicorp https://atomicorp.com/about-ossec/	Correlate and analyze logs, log-based intrusion detection	File Integrity Monitoring (FIM), Log Monitoring, Rootkit Detection, Auditing, Export to SIEMs, Active Response, Process Monitoring, time-based alerting, and Log Analysis
3	OSSIM: Open-Source Security Information and Event Management (SIEM)	AlienVault® OSSIM™, in 2008 • Currently, AT & T Cybersecurity in 2019	Log Processing, correlation directives (rules), Behavioral monitoring, SIEM event correlation	• Lacks support for Cloud-based servers and applications • Reports are heavy and detailed, and tedious to parse through
4	Suricata: free and open-source, a real-time intrusion detection system	Owned and supported by the Open Information Security Foundation (OISF) www.openinfosecfoundation.org	Signature-based intrusion detection, process multithreading to improve processing speed [28]	• Suricata can handle larger volumes of traffic as compared to Snort
5	Bro: • An open-source software framework • Detect behavioral abnormalities on a network	• Initially written by Vern Paxson • Later in 2018, Paxson and the project's leadership team gave a new name to this project Zeek for developing the IDS. • Like Suricata or Snort, it is also rules-based IDS. https://bricata.com/blog/what-is-bro-ids/	• Script interpretation.	• Transforms network traffic data into higher-level events. • Offers a script interpreter
6	Fragroute/ Fragrouter: a network intrusion detection evasion toolkit	D. Son https://monkey.org/~dugsong/fragroute/	• When Fragroute initialize, it deletes the route to the target • Intercepts network traffic and modifies the packets before forwarding	• Probe packets can be fragmented easily with Fragrout • ICMP echo request messages are used by fragtest
7	BASE: Basic Analysis and Security Engine (BASE) offers a Web-based front end for examining the alerts produced by Snort.	https://sourceforge.net/projects/secureideas/	It offers a web front-end to query and analysis the alerts produced by a SNORT IDS.	• User authentication and role-based system • Search interface and Query-builder for identical alerts matching from the alert meta information • Packet viewer (decoder)
8	Sguil: Built by a group named network security analysts	https://github.com/bammv/sguil/releases/tag/v0.9.0	• Event-driven analysis • Network Security Monitoring	• Captures raw packet, session data, and Real-time events • Compatible on the operating system that supports TCL/TK • Receive alerts from OSSEC, Zeek, Suricata, Snort, and other data sources.

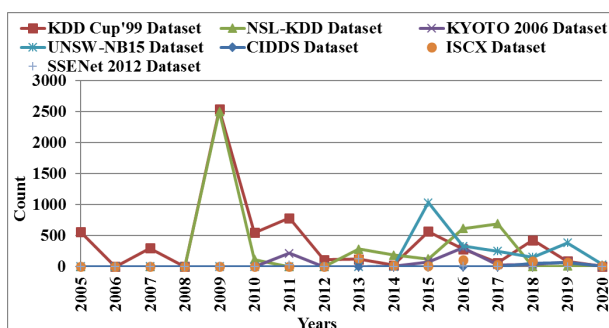**FIGURE 3.** Year-wise distribution of the citation for different datasets from the year 2005 to 2020

statistical-based, knowledge-based, machine learning-based, and bioinspired-based along with their used approaches. Ta-

ble 4 presents the total number of publications, the highest citation in conferences and journals related to intrusion detection, along with the methodologies. Here, we considered research articles from the year 2005 to 2020. There are many optimization approaches for finding the optimal rating of intrusion detection. Table 5 to Table 8 represent different optimization approaches, their corresponding methodologies, citation, and published articles records for intrusion detection models.

Intrusion detection with machine learning approaches, which have the highest publications, is shown graphically in Figure 4. Comparison of citations related to the articles published in conferences and journals among various methodologies, viz-a-viz statistical-based, knowledge-based, and bioinspired-based is shown graphically in Figure 4. Figure 4 also depicts the most cited articles published in


TABLE 3. Benchmark Datasets used in NIDS Models

S. No.	Datasets	Advantages	Disadvantages	Total Number of Citation from the year 2005 to 2020
1	KDD CUP'99: KDD stands for Knowledge Discovery in Databases https://bit.ly/3wSG5YA	<ul style="list-style-type: none"> • Extensive repository of attack vectors, Large amount of attacks 	<ul style="list-style-type: none"> • Obsolete in fixing of many attacks • It does not provide real attack data [31] 	6382
2	NSL- KDD: NSL-KDD is an updated version of the KDD cup99 data set where NSL stands for Network Security Laboratory. http://205.174.165.80/CICDataset/NSL-KDD/	<ul style="list-style-type: none"> • No duplicate data found within the NSL-KDD train dataset and Test set • Contains a reasonable number of samples by train and test sets [31] 	<ul style="list-style-type: none"> • According to McHugh et al. in [32], NSL-KDD may not represent real network flow. [33] 	4521
3	UNSW-NB15 Dataset : [34] https://bit.ly/2Q1k895	<ul style="list-style-type: none"> • Separate training and test set. • 45 Distinct IP addresses • Publicly available 	<ul style="list-style-type: none"> • UNSW-NB15 datasets contain a limited number of attacks and no attacks related to cloud computing, like SQL injection • Imbalanced training and testing classes [35] 	2172
4	Kyoto 2006+ : https://bit.ly/3gLf7vo	<ul style="list-style-type: none"> • 14 attributes are the same as in KDD CUP 99, besides 10 new attributes • Provides real attack data [36] 	<ul style="list-style-type: none"> • Limited volume of 'normal' traffic and 'Normal' data is unrealistic that makes it a low backdrop for the attack data • Normal traffic records incorporated from a single server with a single domain that includes e-mail and DNS traffic only. • Limited realistic variety of 'normal' traffic records 	731
5	ISCX 2012 Dataset: ISCX stands for Information Security Center of Excellence https://bit.ly/2RI9o5B	<ul style="list-style-type: none"> • Upto-date dataset compared to the other commonly datasets • Representative of real network traffic • Dynamic, scalable, reproducible, and labeled benchmark dataset [37] 	<ul style="list-style-type: none"> • ISCX-2012 does not comprise any novel traffic attributes or session-based records • Due to its unidirectional nature, it is challenging to the buried context in the payload data [36] 	472
6	SSENet 2012 Dataset: (Unknown link)	Generated in a real network environment	Unknown	158
7	CIDDS-001 Dataset: The University of Coburg published CIDDS (Coburg Intrusion Detection Data Sets) https://bit.ly/3mLQAYT	<ul style="list-style-type: none"> • Contains detailed metadata for more in-depth investigations • Contains modern attacks network traces • Multi-class and binary classes. [38] 	it includes some biased features such as host IP, destination IP, and Date identified may create biases and not be helpful to detect the attacks [39]	121

TABLE 4. Highest Citation for an Article from the Year 2005 to 2020 of the methodology used for network-based intrusion detection models

Methodology	Description	Total Number of Publication	Highest Citation for an Article in conference	Highest citation for an Article in journal
Statistical-Based	Stochastic behavior and well defined	185	200 Song et al. [45]	149 Zhang et al. [46]
Knowledge-Based	Availability of Prior Knowledge of data/ information	126	89 Midi et al. [47]	193 Ben-Asher & Gonzalez [48]
Machine Learning-Based	Categorization of Patterns	588	1280 Sommer & Paxson [49]	1179 Buczak & Guven [50]
Bioinspired-Based	Bio-inspired computing imparts to machine learning and artificial intelligence	31	59 Liang & Xiao [51]	16 Balasaraswathi et al. [29]

conferences those attained a high count than the articles published in journals.

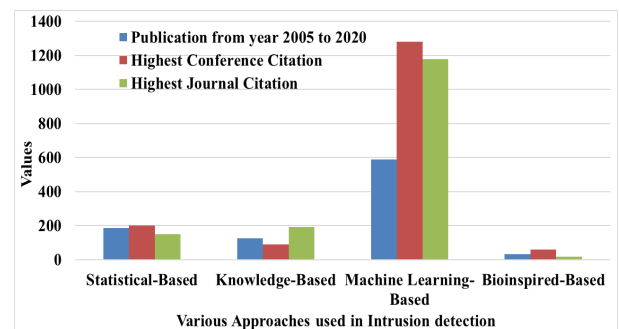**FIGURE 4.** The total number of publications, the highest citation in conferences, and the journals for the different approaches of intrusion detection systems between the years 2005 to 2020

A. STATISTICAL-BASED NIDS

A statistical-based intrusion detection system (SBIDS) [52] use statistical observation on different variables like the login session, resource overflow flags, and timers. The statistical properties like mean, standard deviation, correlation, Analy-

sis of Variance (ANOVA), and statistical tests determine the deviation from the 'normal' behavior of network traffic flow [53].

Articles related to intrusion detection with time-series statistical approach have the highest publication count with the highest citation values than the other statistical approaches, as shown in Figure 5. Table 5 also enlightened the highest cited articles of journals and conferences with citation counts on intrusion detection among different statistical approaches.

TABLE 5. Total number of publication, citations, and highest citation of articles (Conferences and journals) for different approaches of statistical methodologies from the year 2005 to 2020

Approaches	Total Publication	Total Number of Citation	Highest citation in conferences	Highest citation in Journals
Time Series	10414	3765	94 Viinikka et al. [54]	88 Viinikka et al. [55]
Multivariate	2972	1286	64 Delgosha & Fekri [56]	25 Sarasamma & Zhu [57]
Univariate	618	227	0	81 Wang et al. [58]

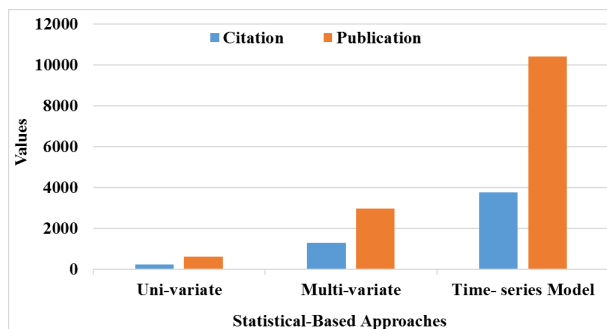


FIGURE 5. Various statistical-based Intrusion detection approaches with the number of publications and the highest citation in conferences and the journal between the years 2005 to 2020.

Year-wise publications and citation distribution comparisons of articles among various statistical approaches are displayed graphically in Figure 6 and Figure 7 respectively. Articles regarding IDS based on the time-series model represent the highest citations and publications values than the other statistical approaches, shown in Figure 5.

Here, two sharp points are observed. One is that time series-based article publications are highest in counting than the other statistical approaches. Second, the number of publications has grown from 5 publications in 2005 to 36 publications in 2019. A year-wise publication analysis among different statistical approaches and articles based on time series model-based intrusion detection also showed the highest publication in 2019 with 36 publications.

Figure 7 shows a year-wise citation count for statistical approaches. The year 2013 has the highest citation score, but citations among other years remain almost the same. It

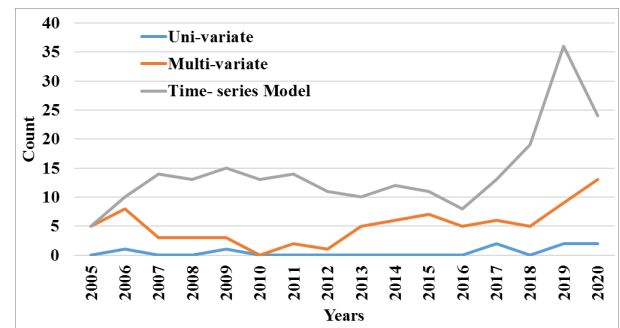


FIGURE 6. Year-wise articles publication distribution for statistical approaches from the year 2005 to 2020

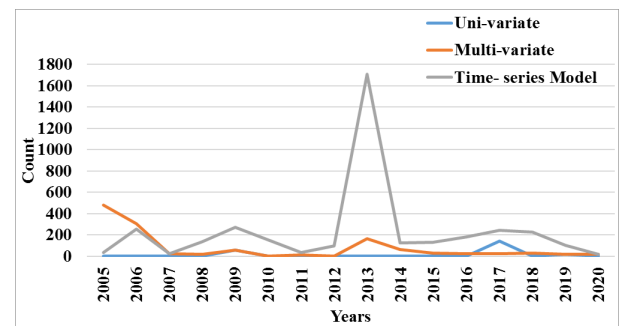


FIGURE 7. Year-wise citation distribution of articles for statistical approaches from the year 2005 to 2020

implies that the popularity related to the time-series model-based statistical approach has a steady increase. It also depicts that research on time-series model-based intrusion detection is almost constant from 2005 to 2020. Around 200 citations per year are added in the citation records with 10414 published articles.

B. KNOWLEDGE-BASED NIDS


Knowledge-based IDS (KBIDS) congregate intrusive information about networks and produces less false alarm rate with high accuracy in intrusion detection. But KBIDS requires up to Date knowledge repository about network traffic behavior [53]

All knowledge-based techniques with their total number of publications and citations are tabulated in Table 6. The highest cited article based on the expert system is by authors Patcha & Park in [59] with the count 1695.


Figure 8 depicts that expert system-based publication count and citation have a higher value than finite state machine (FSM) and descriptive language. As shown in Figure 9, initially, the published article counts have higher values for the FSM technique from 2005 to 2011 as compared with other techniques in the knowledge-based methodologies. The publication count was highest in 2010, with a value of 30 for the FSM technique for the knowledge-based research articles. But the total published articles based on the expert system are 3313, which is the highest among other research

TABLE 6. Analysis of research trends in different approaches of Knowledge-based intrusion detection systems

Approaches	Total Publication	Total Number of Citation	Highest citation in conferences	Highest citation in Journals
Expert System	3313	3185	108 Treinen & Thurimella [60]	1695 Patcha & Park [59]
FSM	2429	2309	400 Tan & Sherwood [61]	116 Tan et al. [62]
Descriptive Language	49	36	3 Zhu et al. [63]	1 Sourek & Zelezny [64]

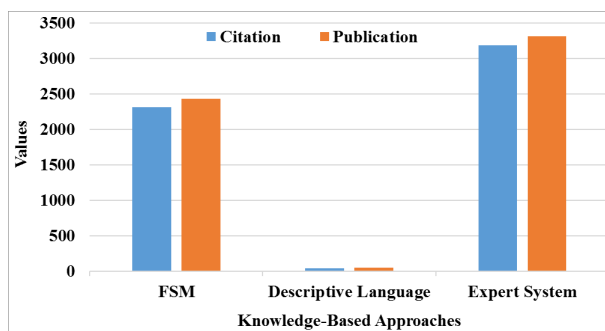
**FIGURE 8.** Publications versus citations among various knowledge-based approaches used in the intrusion detection system.

published articles in knowledge-based intrusion detection articles.

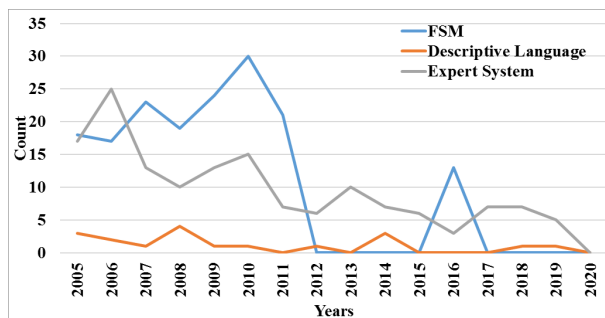**FIGURE 9.** Publication analysis for different knowledge-based approaches along with intrusion detection

The most cited article based on a knowledge-based approach for intrusion detection is [59], written by Patcha & Park with 1695 citations. The work in [59] explores the use of finite state machines as a knowledge-based approach. Figure 10 represents the year-wise citation distribution of knowledge-based research articles in the intrusion detection field. Based on the three curves in Figure 8, expert system-based articles have higher citations from 2005 to 2020. It means that the research trend in the expert system approach of knowledge-based intrusion detection is higher than the other knowledge-based methodologies.

Figure 10 shows that before a decade, expert-system-

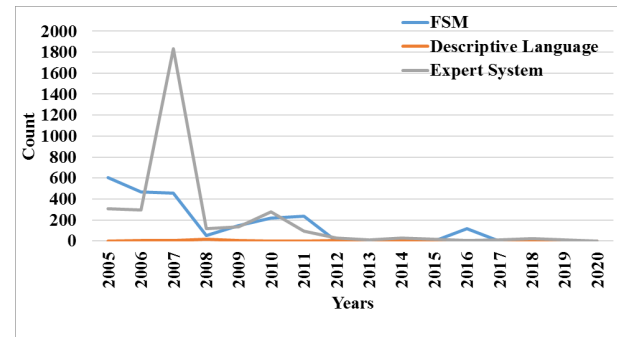**FIGURE 10.** Citation analysis for different knowledge-based approaches along with intrusion detection

based research trends had some significant values. But in the present scenario, knowledge-based research for intrusion detection is not a valuable research trend. The research trend based on different knowledge-based techniques gets falls after the years 2008 and 2010.

C. MACHINE LEARNING-BASED NIDS

Traditionally, NIDSs are designed based on high-dimensional network traffic classification into normal or intrusive data. Due to the high dimensionality of network traffic data, intrusive information detection is significantly slower in traditional NIDS. Such traditional NIDSs with a machine learning approach on selected features take comparatively low FPR (false-positive rate) with a high TPR (true positive rate) for predicting the traffic behavior of network [65]. Machine learning-based classifier models trained and fit over on the training sets among selected 'important' features. The 'important' and relevant feature subsets are selected based on which machine learning-based classifier gets trained. Training sets consist of respond classes over which the classifier gets trained and fit over to recolonize network traffic data behavior/classes.

In Table 7, machine learning-based publication and citation counts of articles for IDS are tabulated. According to this table, the SVM is the utmost interested (cited) technique for intrusion detection researchers. The neural network, followed by the decision tree, is also an exciting machine learning-based intrusion detection technique. Table 7 also depicts the total number of publications and citation counts of articles and the most referred articles published in the conferences or the journals.

Articles based on SVM for intrusion detection systems have the highest cited topic in the research. Even though published articles are higher on neural-network-based intrusion detection than the SVM and fuzzy logic, as shown in Figure 11. In contrast, Gao et al. in [33] explored the drawbacks of the SVM algorithm, which consumes a long time and without gain of accuracy. The Adaboost-based model is not ideal whereas, the precision obtained on implementing logistic regression algorithm is not high for intrusion detection.

TABLE 7. Machine learning-based analysis of research trends in intrusion detection

Approaches	Total Publication	Total Number of Citation	Highest citation in conferences	Highest citation in Journals
SVM	1716	27329	124 Heba et al. [66]	188 Al-Yaseen et al. [67]
Neural Network	2152	21705	789 Shi et al. [68]	817 Wu & Banzhaf [69]
Decision Tree	757	12798	307 Stein et al. [70]	744 Chebrolu et al. [71]
Fuzzy Logic	820	8415	56 Shanmugam & Idris [72]	108 Fulsoundar V.S et al. [73]
KNN	252	5496	124 Alazab et al. [74]	265 Abuomman & Reaz [75]
PCA	381	4279	125 Wang & Battiti [76]	184 Pajouh et al. [77]
Heuristic-Based	217	3542	204 Fogla & Lee [78]	255 Aydin et al. [79]
Bayesian Network	229	3374	7 Tabia & Leray [80]	744 Chebrolu et al. [71]
Markov Model	284	3271	92 Khanna & Liu [81]	194 Hu et al. [82]
Random Forest	121	3152	241 Zhang et al. [83]	291 Sindhu et al. [84]
K-mean	297	2804	120 Jianliang et al. [85]	265 Tsai & Lin [86]
AdaBOOST	111	1174	400 Hu et al. [87]	133 Hu et al. [88]
Logistic Regression	90	911	72 Gates et al. [89]	102 Y. Wang [90]
Linear Regression	28	237	13 Hassanzadeh & Sadeghian [91]	0
Clustering and Outlier Detection	15	45	32 Mingqiang et al. [92]	10 Jeyannaet al. [93]
Gradient BOOST	1	3	3 Montalbo & Festijo [94]	0

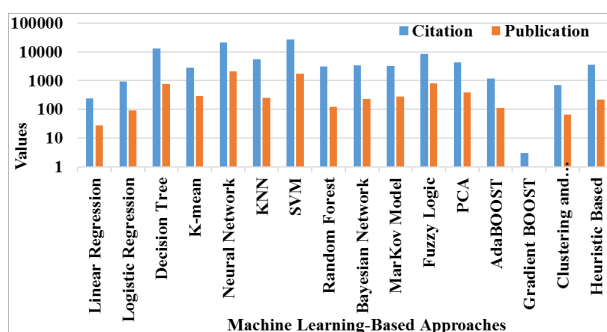
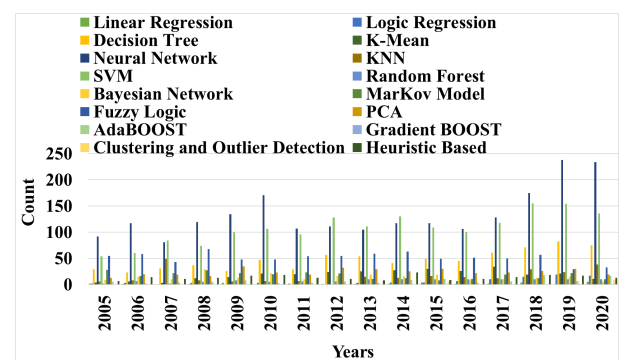
**FIGURE 11.** Publications versus citations among several machine-learning approaches implemented for intrusion detection

Figure 12 depicts that a neural network with intrusion detection is the prime choice for authors with 2152 publications from 2005 to 2020. The second most popular technique among authors is SVM, with 1716 publications for intrusion detection after the neural network. Based on 757 publications, the third rank is observed for the decision tree with intrusion detection.

On the other side, the total citation count of published articles is also recorded based on the different machine-learning practices among IDS. Figure 13 represents this citation analysis. The total citation count regarding neural networks is 21705, which is less than the citation count

**FIGURE 12.** Publication analysis among several machine-learning approaches applied in IDS

among SVM. SVM has a citation count of 27329. Moreover, SVM has the highest citation count rank, the neural network has the second rank, and the decision tree has the third rank followed by fuzzy logic.

It means that SVM is the most favorite subject among researchers and academicians regarding intrusion detection references.

D. BIO-INSPIRED-BASED NIDS

Bio-inspired are popular approaches used for optimization and problem-solving. The requirement for enhancing accu-

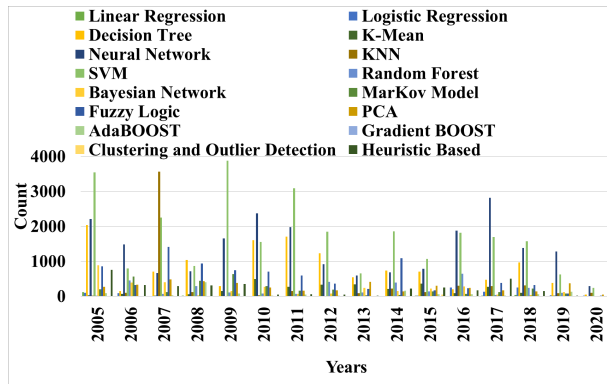


FIGURE 13. Citation analysis for different machine-learning approaches applied in IDS

racy and efficiency enforces the use of bio-inspired stochastic algorithms, such as Particle swarm optimization (PSO), Genetic algorithm (GA), for solving deterministic problems.

The total published article count, total citation count, most cited/ referred articles concerned with bio-inspired approaches are tabulated in Table 8.

Table 8 along Figure 14 represent the comparison of total article publication and citation count. Genetic programming has the highest published article count with a value of 899 and spikes a citation count with the value 9240. Figure 14 represents a year-wise distribution of the total number of publications and total citation counts, yearly. Genetic algorithm-based articles are highest published in the category of evolution-based intrusion detection. On the other hand, articles published based on ACO for intrusion detection have the highest value in the swarm-based algorithm category. Published articles count in the ecology-based category has a nominal value with 4 numbers.

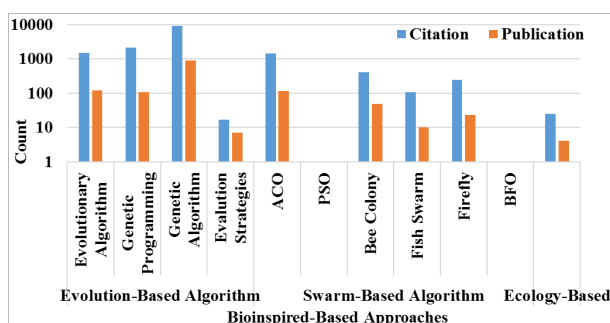


FIGURE 14. Analysis for various bioinspired approaches along with the total number of publications and total citations from the year 2005 to 2020

Figure 15, Figure 16 and Figure 17 represent a year-wise distribution of published articles count, while Figure 18, Figure 19 and Figure 20 represent the year-wise citation counts for the different bio-inspired approaches used for intrusion detection systems. According to Figure 15 and Figure 18, year-wise published articles count and citation count for genetic algorithm along intrusion detection system have a high

TABLE 8. Analysis for various bio-inspired approaches along with different algorithms for Intrusion Detection

Bio-inspired Approaches	Different bio-inspired Algorithms	Publication	Citation	Highest conference citation	Highest Journal citation
Evolution-Based Algorithm	Genetic Algorithm	899	9240	212 Gong et al. [95]	27 Pawar et al. [96]
	Genetic Programming	106	2179	97 Hansen et al. [97]	87 Faraoun & Boukelif [98]
	Evolutionary Algorithm	122	1529	35 Gómez et al. [99]	5 Pan & Jiao [100]
	Evolution Strategy	7	17	-	7 Zhang et al. [101]
Swarm-Based	ACO	118	1453	118 Tsang & Kwong [102]	232 Feng et al. [103]
	Bee Colony	49	402	59 Wang et al. [104]	66 Hajimirzaei & Navimipour [105]
	Firefly	23	242	1 Devi & Suganthe [106]	89 Shah & Issac [107]
	Fish Swarm	10	106	15 Liu et al. [108]	78 Hajisalem & Babaie [109]
	PSO	1	0	0 XU Wenbo [110]	-
	BFO	1	0	-	0 Kalaivani & Ganapathy [111]
Ecology-Based		4	25	6 Sakar & Kursun [112]	2 Na et al. [113]

distribution in evolution-based category. Similarly, according to Figure 16 and Figure 19, the published articles count and citations for ACO with intrusion detection have the highest year-wise distribution in the swarm-based category.

Hence, ACO in the swarm-based category has the highest research trend in intrusion detection. The genetic algorithm-based IDS has high published article distribution and a high research trend in the evaluation category.

Similarly, ACO in the swarm-based category has the highest research trend for intrusion detection. The genetic algorithm-based IDS has high published article distribution and a high research trend in the evaluation category.

E. COMPARISON OF THE MOST CITED APPROACHES USED IN NIDS

Based on the publication count and citation of articles, Table 9 presents a comparison among the most popular method-

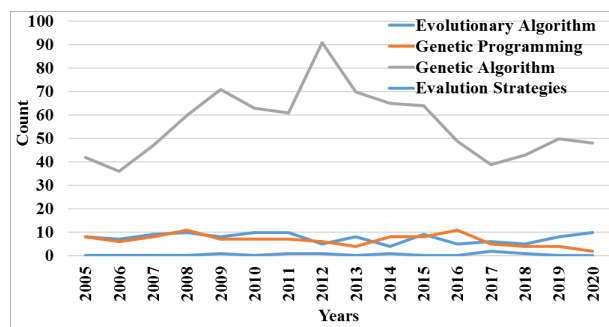


FIGURE 15. Publication analysis for various bio-inspired (Evolutionary) algorithm-based intrusion detection

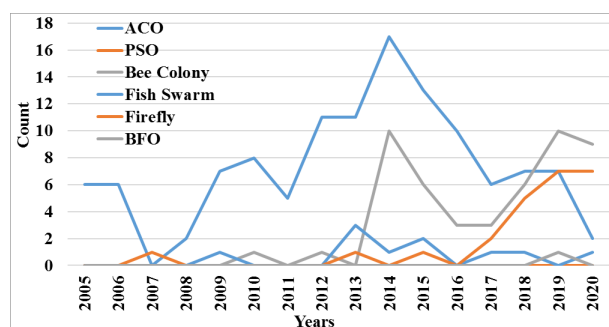


FIGURE 16. Publication analysis for different bioinspired (Swarm)-based intrusion detection

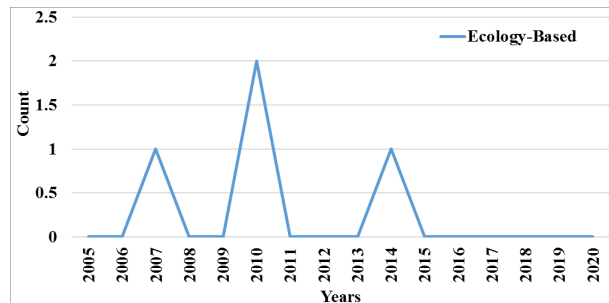


FIGURE 17. Publication analysis for different ecology-based intrusion detection

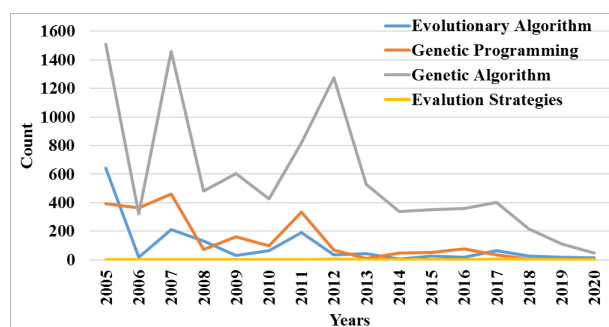


FIGURE 18. Year-wise citation analysis of articles for various evolution-based algorithms in bio-inspired methodology

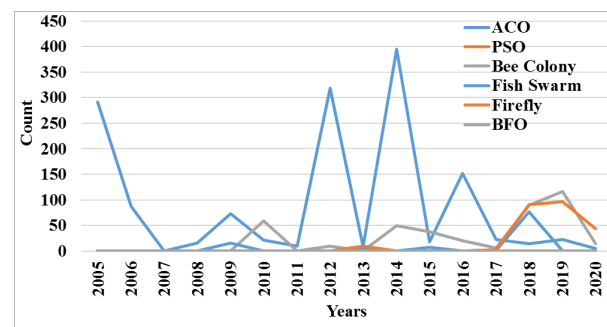


FIGURE 19. Year-wise citation analysis of articles for various swarm-based algorithms in bio-inspired methodology

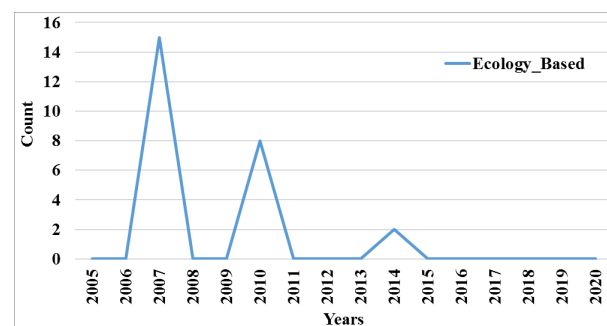


FIGURE 20. Year-wise citation analysis of articles for various ecology-based algorithms in bio-inspired methodology

ologies used for intrusion detection. The most cited approaches in intrusion detection are time-series in statistical-based methodologies, expert systems in knowledge-based methodologies, SVM in machine learning-based methodologies, and genetic algorithms in bio-inspired-based methodologies.

In a time series statistical-based intrusion detection system, a series of events are observed within the interval of time. If a new event falls within a specific time, the possibility of being normal is high. Otherwise, the possibility for an event of being normal is very low [114]. Expert systems (ES) are rule-based approaches used in KBIDS, comprising rules, facts, and inference methods. Each event is first converted into related facts and rules in an IDS system, and then some inference rule is applied to generate prediction [53]. SVM uses a hyper-plane for differentiating the response classes of the dataset. Genetic algorithm (GA) is an evolutionary algorithm-based approach in which optimization is based on mutation [52]. GA encodes a set of solutions to form a population, and GA evolve this population based on fitness function [65].


VII. PERFORMANCE MEASUREMENTS

The performance of network security can be calculated based on efficiency and effectiveness. Efficiency deals with the resources needed to be allocated to the system, including CPU cycles and main memory. In comparison, effectiveness

TABLE 9. A comparative analysis of most cited approaches used in intrusion detection

S. No	Approaches	Advantages	Disadvantages	Total Number of Citation from the year 2005 to 2020
1	Time series in Statistical-based	Clearly defined procedure, better resource allocations	Computationally expensive Generalization rules from a single study and some appropriate measures within a specific time are not possible	3765
2	The expert system in knowledge-based	Applicable to both anomaly and signature-based IDS	High semantic rules generate complex event data abstraction	3185
3	SVM in machine learning-based	Less over-fitting, applicable on unstructured and semi-structured, high dimensional data. SVM provides a solution for solving the more complex problem using kernel function	Hyperparameter C and γ are not easy to tune, Slow training on large data	27329
4	Genetic algorithm in bioinspired-based	Easily retrained Systems, easily parallelized, robust for local minima and local maxima	There is less cross rate with a high mutation in intrusion detection. Choosing a fitness function is also complex.	9240

describes the ability of the system to distinguish between intrusive and non-intrusive activities. In the context of IDS evaluation, researchers generally use metrics to measure the effectiveness quantitatively based on the training and testing of the classifier using benchmark datasets. These metrics measure how well the attack instances are detected against normal instances. The confusion matrix and the receiver operating characteristic (ROC) curve are mainly used to calculate the effectiveness of the IDS.

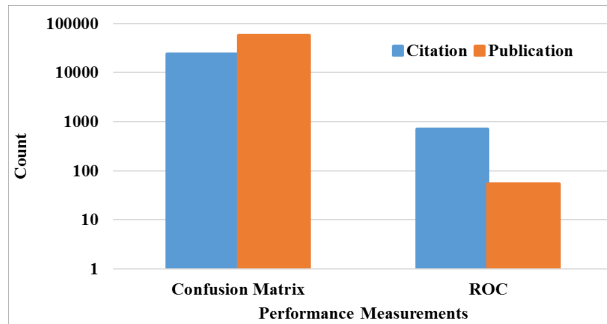**FIGURE 21.** Analysis for confusion matrix and ROC based on the total number of publications and total citations from the year 2005 to 2020

The total publication count for the confusion matrix and ROC curve is 2045 and 54, respectively. On the other side, the citation count for the confusion matrix and ROC is 75349 and 711, respectively. The searching strings as per Table 1 with the filters as described in the Section III are used for the selection of publication and citation records. Figure 21 shows a comparison of citation and publication counts regarding confusion and ROC in the intrusion detection field. This figure depicts that the confusion matrix is more popular and having high research trends in intrusion detection for evaluating IDS models.

A. CONFUSION MATRIX

The confusion matrix is an easy and effective way to characterize the classification results of an IDS. The equations of

metrics, as shown in (1) to (8), are based on the fundamental measuring parameters of the confusion matrix, as shown in Figure 22. The fundamental parameters are

		Predicted Class	
		0	1
True Class	0	TN	FP
	1	FN	TP

FIGURE 22. Confusion Matrix and Performance Measurement

- TP: True positive (TP) are the classified instances as ‘normal’ traffic flow.
- TN: True negatives (TN) are the classified instances as ‘attack’ traffic flow.
- FP: False positives (FP) are the wrongly classified instances as ‘normal’ instead of ‘attack’
- FN: False negatives (FN) are the wrongly classified instances as ‘attack’ instead of ‘normal’

The performance of the NIDM with data mining classifier is measured based on the following metrics discussed by Almomani in [65], and Ferrag et al. in [115] also.

1. Misclassification Rate (MCR): MCR defines how often is the classifier wrong.

$$MCR = \frac{FP+FN}{TP+TN+FP+FN} \quad (1)$$

2. Accuracy: It gives the total number of correct classifications, i.e., how often is the classifier correct.

$$Accuracy = \frac{TP+TN}{TP+TN+FP+FN} \times 100 (\%) \quad (2)$$

3. True Positive Rate: It is also known as Recall or Sensitivity. It gives the total number of correct classifications regarding incorrect classification.

$$\text{TruePositiveRate} = \frac{TP}{TP+FN} \quad (3)$$

4. Specificity: Specificity is also known as the true negative rate (TNR). It represents how properly a classifier identifies true negatives. It gives the number of intrusive classifications regarding the total number of intrusive data (i.e., $TN + FP$) during training.

$$\text{Specificity} = \frac{TN}{FP+TN} \quad (4)$$

5. Precision (Prec): When it predicts 'normal', how often is it correct.

$$\text{Prec} = \frac{TP}{TP+FP} \quad (5)$$

6. False Positive Rate (FPR): When it is actually attacked, how often does it predict normal

$$\text{FPR} = \frac{FP}{TP+FN} \quad (6)$$

7. Prevalence: Prevalence tells that how often does the yes condition actually occurs in our sample.

$$\text{Prevalence} = \frac{\text{Actual_Normal}}{TP+TN+FP+FN} \quad (7)$$

8. F-Score: It serves as a derived effectiveness measurement.

$$\text{F-Score} = \frac{2 * TP}{2 * TP + FP + FN} \quad (8)$$

The values of these metrics lie in the range of 0 to 1 except accuracy, which is represented as a percentage.

Figure 23 and Figure 24 presents the year-wise distribution of published article count and citation count respectively. These graphs show that accuracy has the highest popularity followed by specificity and FPR.

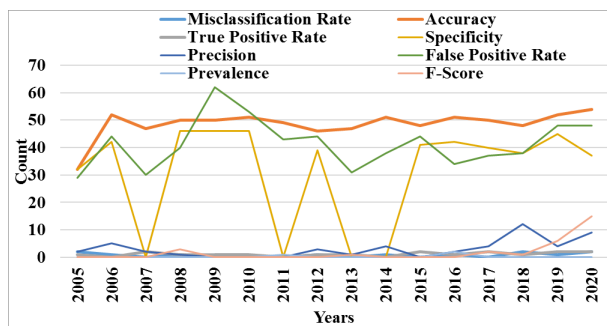


FIGURE 23. Publication distribution analysis of various evaluation metrics used for the intrusion detection system.

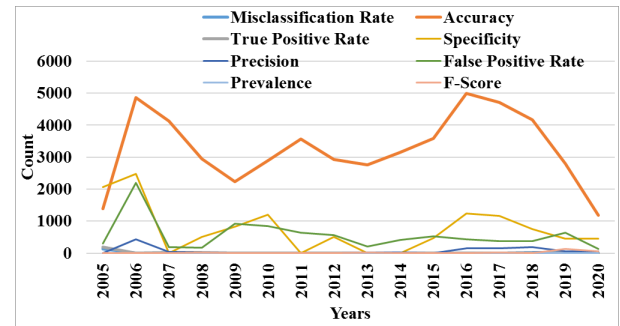


FIGURE 24. Citation analysis of various evaluation metrics used for intrusion detection systems

B. ROC

The ROC (receiver operating characteristic) curve can also be used to measure the efficiency and efficacy of an IDS. A ROC is termed a performance curve. ROC is a graph between detection accuracy against false alarm rate. Alternatively, it displays the false alarm rate generated by the detector at a specified probability of detection [116]. The area under the curve (AUC) determines the misclassification in an IDS. If AUC is less than or equal to 0.5, it means misclassification is more than 50 percent, and the performance is poor for intrusion detection model [117].

For an illustration, we simulated an intrusion detection model using a decision tree as a classifier in an environment of Intel Core i5 2.60 GHz with 7.88 GB of RAM along with MatLab R2017b. The KDD cup'99 dataset is considered a benchmark dataset. The training set, which consists of 494021 records, is trained on the two response classes which are either of 'intrusion' or 'normal' dataset records. Hence, Figure 25 as ROC is plotted for the simulated IDS model.

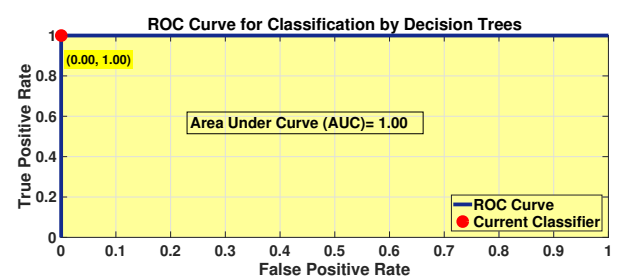


FIGURE 25. ROC curve and AUC for decision tree as a classifier in the intrusion detection model.

In Figure 25, the x-axis signifies the FPR (False Positive Rate) as 0.00, while the y-axis denotes the TPR (True Positive Rate) as 1.0. Here, classification accuracy is 100% for the training of the classifier.

Figure 26 and 27 represents the year-wise distribution of publication and citation count, respectively. These two figures depict that articles related to ROC in the field of intrusion detection are growing gradually since 2005 and hence, the popularity and research trend in intrusion detection

of ROC to evaluate the IDS model is minimal as compared to accuracy, specificity, and FPR.

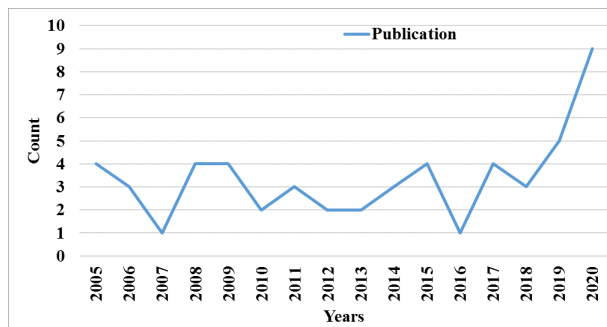


FIGURE 26. Publication distribution analysis for ROC for evaluation of intrusion detection system

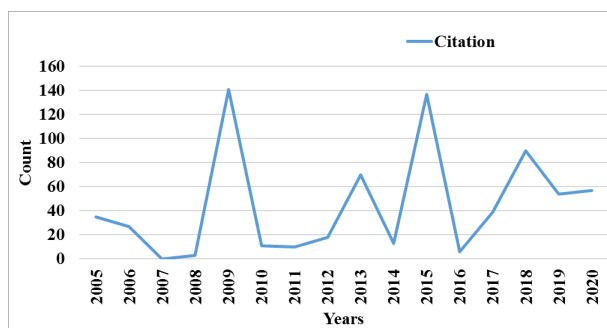


FIGURE 27. Citation analysis for ROC for evaluation in intrusion detection

The number of published articles, total citation count, highest cited article in conference and journal regarding performance measurements are tabulated in Table 10. Table 10 along Figure 23, and Figure 26 represents the publication analysis. While, Table 10 along Figure 24, and Figure 27 represents the citation analysis of the different performance evaluation matrix in the field of intrusion detection.

VIII. DISCUSSION

As highlighted in Section I, an IDS provides a prominent mechanism to the computer network security system by generating an alarm on detecting malicious information. The study in this article presents quantification of popularity based on citations of articles related to NIDS. We have analyzed the intrusion detection-related articles categorically in different classes viz-a-viz the commercially used IDS, the datasets to evaluate the NIDS models, the approaches used in NIDS, and different evaluation metrics. Here, Microsoft Academic is used for taking the records of citations of the published articles related to datasets, and various methodologies with their subclasses.

The analysis for research trends in benchmark datasets to evaluate NIDS models is also presented graphically. It is found that the KDD Cup'99 dataset has the highest popularity, followed by the NSL-KDD dataset. But the problem

TABLE 10. Analysis for performance metrics for Intrusion Detection

Performance measurements	Metrics	Publication	Citation	Highest conference citation	Highest Journal citation
Confusion Matrix	Misclassification Rate	12	190	5 Atli et al. [118]	126 Yun Wang [90]
	Accuracy	778	52324	135 Xu & Wang [119]	331 Sindhu et al. [84]
	True Positive Rate	18	259	22 Xiao & Xiao [120]	190 Pietraszek & Tanner [121]
	Specificity	494	12158	745 Raza et al. [122]	325 Cavusoglu et al. [123]
	Precision	49	1150	23 Penya et al. [124]	66 Wang et al. [125]
	False Positive Rate	663	8988	111 Yu & Frincke [126]	2 Shan-qing et al. [127]
	Prevalence	3	14	9 Jan Vykopal [128]	5 Li & Liao [129]
	F-Score	28	266	23 Ullah & Mahmoud [130]	73 Zeng et al. [131]
ROC		54	711	6 Sakar & Kursun [112]	2 Na et al. [113]

with the KDD'99 dataset is that it is a very old dataset and it does not resemble the traffic data flow of the present scenario. Nevertheless, there are other datasets also available, but the research trend in these datasets is very less due to the less popularity of these new datasets among researchers. It is suggested that researchers must be encouraged to the new datasets with richer features according to the modern environment.

Bioinspired-based NIDS, especially swarm-based NIDS, has very limited literature. These approaches often show quick convergence. But, there is a lack of theoretical literature that how these algorithms can do quickly converge. Parameter tuning is also another major issue related to the bioinspired-based approach and there are only a few articles related to parameter tuning for these algorithms for intrusion detection.

The tabular and graphical analysis of this article explores that researchers are more attracted to the field in which a high count of published articles with high citation values are recorded. Furthermore, the year-wise distributions also show that researchers abide by the research field in which publication count and citation have a high value. Unquestionably, the future of IDS is promising. Furthermore, the research

trends in IDS research will grow where publication count and citation have high values for the articles. It is evident from the literature review that researchers are required to evaluate algorithms based on bio-inspired approaches for intrusion detection. Machine learning and bioinspired-based new hybrid algorithms can also be evaluated and compared to promote efficient and accurate intrusion detection systems.

A similar type of approach as used in the current article can also be implemented to quantify research trends in other areas such as image processing, cloud computing, data mining, bio-informatics, etc. This type of review will help for finding the most popular and disinclined methodologies in a particular research area. More effort will be made by the research community after finding such popularity comparison in those approaches where less effort have been made.

In the future, we want to implement the less cited bio-inspired approaches that have few publication count values for articles related to network intrusion detection systems for future subsequent work. We want to determine whether the less cited approaches with fewer counts of published articles are equally applicable to achieve an efficient and effective intrusion detection model.

IX. CONCLUSION

We explored a comprehensive and straightforward analysis for anyone who wants to compare various approaches used to design Network Intrusion Detection models. This review is established based on numerous research papers in different journals/publications between 2005 and 2020. In this article, we took citation as a quantitative measure to review the popularity of the intrusion detection system among various approaches. This paper presents various tables that offer a rapid analysis of different NIDS, research trends, and research scope. A review of diverse datasets with their characteristics, merits, demerits, and citation analysis has also been presented here in this paper. The various approaches used in the network intrusion detection system are tabulated with their advantages and disadvantages also. A review concerning research trends regarding different techniques in IDS is presented.

The comparative research trend analysis regarding intrusion detection systems for a network is also graphically presented based on citation and number of published article counts. The most cited articles, with their citation count for conferences and journals, are also presented. The popular approaches, with the most cited papers regarding their methodology, are tabulated in different tables. We also observed that articles published in conferences have the highest citation than the articles published in journals.

REFERENCES

- [1] R. Heady, G. Luger, A. Maccabe, and M. Servilla. The architecture of a network level intrusion detection system. Technical report, Los Alamos National Lab., NM (United States), New Mexico Univ., Albuquerque, 1990.
- [2] H. Liu and B. Lang. Machine learning and deep learning methods for intrusion detection systems: A survey. *Applied Sciences*, 9(20), 2019.
- [3] L. C. Smith. Citation analysis. 1981.
- [4] M. Thelwall. Microsoft Academic Automatic Document Searches: Accuracy for journal articles and suitability for citation analysis. *J. Informetrics*, 12:1–9, 2018.
- [5] M. Gusenbauer. Google Scholar to overshadow them all? Comparing the sizes of 12 academic search engines and bibliographic databases. *Scientometrics*, 118:177–214, 2018.
- [6] Paperpile. The top list of academic search engines, 22 June 2021. [Online].
- [7] Wikimedia Foundation. List of academic databases and search engines, 22 June 2021 [Online].
- [8] A. Martín-Martín, M. Thelwall, E. Orduna-Malea, and E. D. López-Cózar. Google Scholar, Microsoft Academic, Scopus, Dimensions, Web of Science, and OpenCitations' COCI: a multidisciplinary comparison of coverage via citations. *Scientometrics*, 126(1):871–906, 2021.
- [9] Microsoft. Microsoft Academic, [available at: <https://academic.microsoft.com>].
- [10] M. Bishop. Trends in academic research: vulnerabilities analysis and intrusion detection. *Computers & Security*, 21(7):609–612, 2002.
- [11] P. Kabiri and A. A. Ghorbani. Research on intrusion detection and response: A survey. *International Journal of Network Security*, 1(2):84–102, 2005.
- [12] M. Zamani and M. Movahedi. Machine learning techniques for intrusion detection. *arXiv preprint arXiv:1312.2177*, 2013.
- [13] S. Agrawal and J. Agrawal. Survey on anomaly detection using data mining techniques. *Procedia Computer Science*, 60(1):708–713, 2015.
- [14] M. Ahmed, A. Naser Mahmood, and J. Hu. A survey of network anomaly detection techniques. *Journal of Network and Computer Applications*, 60:19–31, 2016.
- [15] D. Camacho. Bio-inspired clustering: Basic features and future trends in the era of big data. In *2015 IEEE 2nd International Conference on Cybernetics (CYBCONF)*, pages 1–6, 2015.
- [16] A. A. Gendreau and Michael Moorman. Survey of intrusion detection systems towards an end to end secure Internet of Things. In *2016 IEEE 4th International Conference on Future Internet of Things and Cloud (FiCloud)*, pages 84–90, 2016.
- [17] Y. Hamid, Balasaraswathi, V. Ranganathan, L. Journaux, and M. Sugumaran. Benchmark datasets for network intrusion detection: A review. *Int. J. Netw. Secur.*, 20(4):645–654, 2018.
- [18] P. Mishra, V. Varadharajan, U. Tupakula, and E. S. Pilli. A detailed investigation and analysis of using machine learning techniques for intrusion detection. *IEEE Communications Surveys and Tutorials*, 21(1):686–728, 2019.
- [19] J. P. Anderson. Information security in a multi-user computer environment. In *Advances in Computers*, volume 12, pages 1–36. Elsevier, 1972.
- [20] J. P. Anderson. Computer security threat monitoring and surveillance. Anderson Co., Fort Washington, PA, 1980.
- [21] G. Bruneau. The history and evolution of intrusion detection. *SANS Institute*, 1, 2001.
- [22] R. Zuech, T. M. Khoshgoftaar, and R. Wald. Intrusion detection and big heterogeneous data: A survey. *Journal of Big Data*, 2(1):1–41, 2015.
- [23] M. Sazzadul Hoque, M. Abdul Mukit, and M. A. Naser Bikas. An implementation of intrusion detection system using genetic algorithm. *arXiv preprint arXiv:1204.1336*, 2012.
- [24] C. V. Anchugam and K. Thangadurai. Classification of network attacks and countermeasures of different attacks. In *Network Security Attacks and Countermeasures*, pages 115–156. IGI Global, 2016.
- [25] A. A. Ghorbani, W. Lu, and M. Tavallae. Network attacks. In *Network Intrusion Detection and Prevention*, pages 1–25. Springer, 2010.
- [26] M. Pihelgas. A comparative analysis of open-source intrusion detection systems. Tallinn: Tallinn University of Technology & University of Tartu, 2012.
- [27] M. Norton. Optimizing pattern matching for intrusion detection. Sourcefire, Inc., Columbia, MD, 2004.
- [28] S. Patil, P. B. Rane, and Dr. B. B. Meshram P. S. Kulkarni. Snort, BRO, NetSTAT, Emerald and SAX2 : A comparison. *International Journal of Advanced Research in Computer Science*, 3:317–323, 2012.
- [29] V. R. Balasaraswathi, M. Sugumaran, and Y. Hamid. Feature selection techniques for intrusion detection using non-bio-inspired and bio-inspired optimization algorithms. *Journal of Communications and Information Networks*, 2(4):107–119, 2017.
- [30] M. Ring, S. Wunderlich, D. Scheuring, D. Landes, and A. Hotho. A survey of network-based intrusion detection data sets. *Computers & Security*, 86:147–167, 2019.

- [31] N. Sainis, D. Srivastava, and R. Singh. Feature classification and outlier detection to increased accuracy in intrusion detection system. *International Journal of Applied Engineering Research*, 13(10):7249–7255, 2018.
- [32] J. McHugh. Testing Intrusion Detection Systems: A critique of the 1998 and 1999 DARPA intrusion detection system evaluations as performed by Lincoln Laboratory. *ACM Trans. Inf. Syst. Secur.*, 3(4):262–294, November 2000.
- [33] X. Gao, C. Shan, C. Hu, Z. Niu, and Z. Liu. An adaptive ensemble machine learning model for intrusion detection. *IEEE Access*, 7:82512–82521, 2019.
- [34] N. Moustafa and J. Slay. UNSW-NB15: A comprehensive dataset for network intrusion detection systems (UNSW-NB15 Network Data Set). In *2015 Military Communications And Information Systems Conference (MilCIS)*, pages 1–6. IEEE, 2015.
- [35] A. Ali Shah, Y. D. Khan, and M. A. Ashraf. Attacks analysis of TCP and UDP of UNCW-NB15 dataset. *VAWKUM Transactions on Computer Sciences*, 8(1):48–54, 2020.
- [36] C. Wheelus, T. M. Khoshgoftaar, R. Zuech, and M. M. Najafabadi. A session based approach for aggregating network traffic data—The SANTA Dataset. In *2014 IEEE International Conference on Bioinformatics and Bioengineering*, pages 369–378. IEEE, 2014.
- [37] S. Soheily-Khah, P. Marteau, and N. Béchet. Intrusion detection in network systems through hybrid supervised and unsupervised mining process—a detailed case study on the ISCX benchmark dataset. 2017.
- [38] A. Verma and V. Ranga. On evaluation of network intrusion detection systems: Statistical analysis of CIDD5-001 dataset using machine learning techniques. *Pertanika Journal of Science & Technology*, 26(3):1307–1332, 2018.
- [39] N. Thapa, Z. Liu, D. B. Kc, B. Gokaraju, and K. Roy. Comparison of machine learning and deep learning models for network intrusion detection systems. *Future Internet*, 12(10):167, 2020.
- [40] N. Moustafa and J. Slay. The UNSW-NB15 data set description. *Unsw. adfa. edu. au*. [Online]. Available: <https://www.unsw.adfa.edu.au/unsw-canberracyber/cybersecurity/ADFA-NB15-Datasets/>. [Accessed: 10-May-2020], 2016.
- [41] S. J. Stolfo, W. Fan, W. Lee, A. Prodromidis, and P. K. Chan. Cost-based modeling for fraud and intrusion detection: Results from the JAM project. In *Proceedings DARPA Information Survivability Conference and Exposition. DISCEX'00*, volume 2, pages 130–144. IEEE, 2000.
- [42] M. Tavallae, E. Bagheri, and W. Luand A. A. Ghorbani. A detailed analysis of the KDD CUP 99 data set. In *2009 IEEE Symposium on Computational Intelligence for Security and Defense Applications*, pages 1–6. IEEE, 2009.
- [43] University Of New Brunswick. NSL-KDD data-set for network-based intrusion detection systems, [available at: <https://www.unb.ca/cic/datasets/nsl.html>].
- [44] V. Jyothsna, R. Prasad, and K. Munivara Prasad. A review of anomaly based intrusion detection systems. *International Journal of Computer Applications*, 28(7):26–35, 2011.
- [45] J. Song, H. Takakura, Y. Okabe, M. Eto, D. Inoue, and K. Nakao. Statistical analysis of honeypot data and building of Kyoto 2006+ dataset for nids evaluation. In *Proceedings of the First Workshop on Building Analysis Datasets and Gathering Experience Returns for Security*, pages 29–36, 2011.
- [46] J. Zhang, R. Perdisci, W. Lee, U. Sarfraz, and X. Luo. Detecting stealthy P2P botnets using statistical traffic fingerprints. In *2011 IEEE/IFIP 41st International Conference on Dependable Systems & Networks (DSN)*, pages 121–132, 2011.
- [47] D. Midi, A. Rullo, A. Mudgerikar, and E. Bertino. Kalis—A system for knowledge-driven adaptable intrusion detection for the internet of things. In *2017 IEEE 37th International Conference on Distributed Computing Systems (ICDCS)*, pages 656–666, 2017.
- [48] N. Ben-Asher and C. Gonzalez. Effects of cyber security knowledge on attack detection. *Computers in Human Behavior*, 48:51–61, 2015.
- [49] R. Sommer and V. Paxson. Outside the closed world: On using machine learning for network intrusion detection. In *2010 IEEE Symposium on Security and Privacy*, pages 305–316, 2010.
- [50] A. L. Buczak and E. Guven. A survey of data mining and machine learning methods for cyber security intrusion detection. *IEEE Communications Surveys and Tutorials*, 18(2):1153–1176, 2016.
- [51] X. Liang and Y. Xiao. Studying bio-inspired coalition formation of robots for detecting intrusions using game theory. *systems man and cybernetics*, 40(3):683–693, 2010.
- [52] S. S. Soniya and S. M. Celestin Vigila. Intrusion Detection System: Classification and techniques. In *2016 International Conference on Circuit, Power and Computing Technologies (ICCPCT)*, pages 1–7. IEEE, 2016.
- [53] S. Jose, D. Malathi, B. Reddy, and D. Jayaseeli. A survey on anomaly based host intrusion detection system. In *Journal of Physics: Conference Series*, volume 1000, page 012049. IOP Publishing, 2018.
- [54] J. Viinikka, H. Debar, L. Mé, and R. Séguier. Time series modelling for IDS alert management. In *Proceedings of the 2006 ACM Symposium on Information, computer and communications security*, pages 102–113, 2006.
- [55] J. Viinikka, H. Debar, L. Mé, A. Lehtikainen, and M. Tarvainen. Processing intrusion detection alert aggregates with time series modelling. *Information Fusion*, 10(4):312–324, 2009.
- [56] F. Delgosha and F. Fekri. Threshold key-establishment in distributed sensor networks using a multivariate scheme. In *Proceedings IEEE INFOCOM 2006. 25TH IEEE International Conference on Computer Communications*, pages 1–12, 2006.
- [57] S. T. Sarassamma and Q. Zhu. Min-max hyper-ellipsoidal clustering for anomaly detection in network security. *Systems Man and Cybernetics*, 36(4):887–901, 2006.
- [58] H. Wang, J. Gu, and S. Wang. An effective intrusion detection framework based on SVM with feature augmentation. *Knowledge Based Systems*, 136:130–139, 2017.
- [59] A. Patcha and J. M. Park. An overview of anomaly detection techniques: Existing solutions and latest technological trends. *Computer Networks*, 51(12):3448–3470, 2007.
- [60] J. J. Treinen and R. Thurimella. A framework for the application of association rule mining in large intrusion detection infrastructures. In *RAID'06 Proceedings of the 9th international conference on Recent Advances in Intrusion Detection*, pages 1–18, 2006.
- [61] L. Tan and T. Sherwood. A high throughput string matching architecture for intrusion detection and prevention. In *Proceedings of the 32nd annual international symposium on Computer Architecture*, volume 33, pages 112–122, 2005.
- [62] L. Tan, B. Brotherton, and T. Sherwood. Bit-split string-matching engines for intrusion detection and prevention. *ACM Transactions on Architecture and Code Optimization*, 3(1):3–34, 2006.
- [63] J. Zhu, Y. Huang, and H. Wang. A formal descriptive language and an automated detection method for complex events in RFID. In *2009 33rd Annual IEEE International Computer Software and Applications Conference*, volume 1, pages 543–552, 2009.
- [64] G. Sourek and F. Zelezny. Efficient extraction of network event types from netflows. *Security and Communication Networks*, 2019:1–18, 2019.
- [65] O. Almomani. A feature selection model for network intrusion detection system based on PSO, GWO, FFA and GA algorithms. *Symmetry*, 12(6):1046, 2020.
- [66] F. Eid Heba, A. Darwish, A. E. Hassanien, and A. Abraham. Principle components analysis and support vector machine based intrusion detection system. In *2010 10th International Conference on Intelligent Systems Design and Applications*, pages 363–367, 2010.
- [67] W. L. Al-Yaseen, Z. A. Othman, and M. Z. Ahmad Nazri. Multi-level hybrid support vector machine and extreme learning machine based on modified K-Means for intrusion detection system. *Expert Systems With Applications*, 67:296–303, 2017.
- [68] Y. Shi, Y. Tian, G. Kou, Y. Peng, and J. Li. Network intrusion detection. *IEEE Symposium on Security and Privacy*, pages 237–241, 2011.
- [69] S. X. Wu and W. Banzhaf. Review: The use of computational intelligence in intrusion detection systems: A review. *Applied Soft Computing*, 10(1):1–35, 2010.
- [70] G. Stein, B. Chen, A. S. Wu, and K. A. Hua. Decision tree classifier for network intrusion detection with GA-based feature selection. In *Proceedings of the 43rd annual Southeast regional conference on*, pages 136–141, 2005.
- [71] S. Chebrolu, A. Abraham, and J. P. Thomas. Feature deduction and ensemble design of intrusion detection systems. *Computers & Security*, 24(4):295–307, 2005.
- [72] B. Shanmugam and N. B. Idris. Improved intrusion detection system using fuzzy logic for detecting anomaly and misuse type of attacks. In *2009 International Conference of Soft Computing and Pattern Recognition*, pages 212–217. IEEE, 2009.
- [73] A. D. Falke, V. S. Fulsoundar, R. S. Pawase, S. B. Wale, and S. J. Ghule. Network intrusion detection system using fuzzy logic. *International Journal of Scientific Research in Education*, 2(4), 2014.

- [74] M. Alazab, S. Venkatraman, P. Watters, and M. Alazab. Zero-Day malware detection based on supervised learning algorithms of API call signatures. In *AusDM '11 Proceedings of the Ninth Australasian Data Mining Conference - Volume 121*, pages 171–182, 2011.
- [75] A. A. Aburomman and M. B. Ibne Reaz. A novel SVM-KNN-PSO ensemble method for intrusion detection system. *Applied Soft Computing*, 38:360–372, 2016.
- [76] W. Wang and R. Battiti. Identifying intrusions in computer networks with principal component analysis. In *First International Conference on Availability, Reliability and Security (ARES'06)*, pages 270–279, 2006.
- [77] H. H. Pajouh, R. Javidan, R. Khayami, A. Dehghantanha, and K. K. Raymond Choo. A two-layer dimension reduction and two-tier classification model for anomaly-based intrusion detection in iot backbone networks. *IEEE Transactions on Emerging Topics in Computing*, 7(2):314–323, 2019.
- [78] P. Fogla and W. Lee. Evading network anomaly detection systems: Formal reasoning and practical techniques. In *Proceedings of the 13th ACM conference on Computer and communications security*, pages 59–68, 2006.
- [79] M. A. Aydın, A. H. Zaim, and K. G. Ceylan. A hybrid intrusion detection system design for computer network security. *Computers & Electrical Engineering*, 35(3):517–526, 2009.
- [80] K. Tabia and P. Leray. Bayesian network-based approaches for severe attack prediction and handling IDSs' reliability. In *International Conference on Information Processing and Management of Uncertainty in Knowledge-Based Systems*, pages 632–642, 2010.
- [81] R. Khanna and H. Liu. System approach to intrusion detection using Hidden Markov Model. In *Proceedings of the 2006 international conference on Wireless communications and mobile computing*, pages 349–354, 2006.
- [82] J. Hu, X. Yu, D. Qiu, and H. H. Chen. A simple and efficient hidden markov model scheme for host-based anomaly intrusion detection. *IEEE Network*, 23(1):42–47, 2009.
- [83] J. Zhang, M. Zulkernine, and A. Haque. Random-forests-based network intrusion detection systems. *systems man and cybernetics*, 38(5):649–659, 2008.
- [84] S. S. Sivatha Sindhu, S. Geetha, and A. Kannan. Decision tree based light weight intrusion detection using a wrapper approach. *Expert Systems With Applications*, 39(1):129–141, 2012.
- [85] M. Jianliang, S. Haikun, and B. Ling. The application on intrusion detection based on K-Means cluster algorithm. In *2009 International Forum on Information Technology and Applications*, volume 1, pages 150–152, 2009.
- [86] C. F. Tsai and C. Y. Lin. A triangle area based nearest neighbors approach to intrusion detection. *Pattern Recognition*, 43(1):222–229, 2010.
- [87] W. Hu, W. Hu, and S. Maybank. Adaboost-based algorithm for network intrusion detection. *systems man and cybernetics*, 38(2):577–583, 2008.
- [88] W. Hu, J. Gao, Y. Wang, O. Wu, and S. Maybank. Online Adaboost-based parametrized methods for dynamic distributed network intrusion detection. *IEEE Transactions on Systems, Man, and Cybernetics*, 44(1):66–82, 2014.
- [89] C. Gates, J. J. McNutt, J. B. Kadane, and M. I. Kellner. Scan detection on very large networks using logistic regression modeling. In *11th IEEE Symposium on Computers and Communications (ISCC'06)*, pages 402–408, 2006.
- [90] Y. Wang. A multinomial logistic regression modeling approach for anomaly intrusion detection. *Computers & Security*, 24(8):662–674, 2005.
- [91] A. Hassanzadeh and B. Sadeghian. Intrusion detection with data correlation relation graph. In *2008 Third International Conference on Availability, Reliability and Security*, pages 982–989, 2008.
- [92] Z. Mingqiang, H. Hui, and W. Qian. A graph-based clustering algorithm for anomaly intrusion detection. In *2012 7th International Conference on Computer Science & Education (ICCSE)*, pages 1311–1314, 2012.
- [93] J. Antony Jeyanna, E. Indumathi, and D. Shalini Punithavathani. A network intrusion detection system using clustering and outlier detection. *International Journal of Innovative Research in Computer and Communication Engineering*, 3(2):975–982, 2015.
- [94] F. J. P. Montalbo and E. D. Festijo. Comparative analysis of ensemble learning methods in classifying network intrusions. In *2019 IEEE 9th International Conference on System Engineering and Technology (ICSET)*, pages 431–436, 2019.
- [95] R. H. Gong, M. Zulkernine, and P. Abolmaesumi. A software implementation of a genetic algorithm based approach to network intrusion detection. In *Sixth International Conference on Software Engineering, Artificial Intelligence, Networking and Parallel/Distributed Computing and First ACIS International Workshop on Self-Assembling Wireless Network*, pages 246–253, 2005.
- [96] S. N. Pawar and R. S. Bichkar. Genetic algorithm with variable length chromosomes for network intrusion detection. *International Journal of Automation and Computing*, 12(3):337–342, 2015.
- [97] J. Hansen and P. Benjamin Lowry and R. D. Meservy and D. M. McDonald. Genetic programming for prevention of cyberterrorism through dynamic and evolving intrusion detection. *Decision Support Systems*, 43(4):1362–1374, 2007.
- [98] K. Faraoun and A. Boukelif. Genetic programming approach for multi-category pattern classification applied to network intrusions detection. *The International Arab Journal of Information Technology*, 4:237–246, 2007.
- [99] J. L. GRAÑA Gómez, C. Gil, R. N. Baños, A. L. Márquez, F. G. Montoya, and M. G. Montoya. A Pareto-based multi-objective evolutionary algorithm for automatic rule generation in network intrusion detection systems. *Soft Computing*, 17(2):255–263, 2013.
- [100] X. Pan and L. Jiao. A granular agent evolutionary algorithm for classification. *Applied Soft Computing*, 11(3):3093–3105, 2011.
- [101] B. C. Zhang, G. Y. Hu, Z. J. Zhou, Y. M. Zhang, P. L. Qiao, and L. L. Chang. Network intrusion detection based on directed acyclic graph and belief rule base. *Etri Journal*, 39(4):592–604, 2017.
- [102] C. H. Tsang and S. Kwong. Multi-agent intrusion detection system in industrial network using ant colony clustering approach and unsupervised feature extraction. In *2005 IEEE International Conference on Industrial Technology*, pages 51–56, 2005.
- [103] W. Feng, Q. Zhang, G. Hu, and J. X. Huang. Mining network data for intrusion detection through combining SVMs with ant colony networks. *Future Generation Computer Systems*, 37:127–140, 2014.
- [104] J. Wang, T. Li, and R. Ren. A real time IDS based on artificial bee colony-support vector machine algorithm. In *Third International Workshop on Advanced Computational Intelligence*, pages 91–96, 2010.
- [105] B. Hajimirzaei and N. Jafari Navimipour. Intrusion detection for cloud computing using neural networks and artificial bee colony optimization algorithm. *ICT Express*, 5(1):56–59, 2019.
- [106] E. M. Roopa Devi and R. C. Suganthe. Improved relevance vector machine (IRVM) classifier for intrusion detection system. *soft computing*, 23(19):9111–9119, 2019.
- [107] S. A. Raza Shah and B. Issac. Performance comparison of intrusion detection systems and application of machine learning to snort system. *Future Generation Computer Systems*, 80:157–170, 2018.
- [108] T. Liu, A. L. Qi, Y. B. Hou, and X. T. Chang. Feature optimization based on artificial fish-swarm algorithm in intrusion detections. In *2009 International Conference on Networks Security, Wireless Communications and Trusted Computing*, volume 1, pages 542–545, 2009.
- [109] V. Hajisalem and S. Babaie. A hybrid intrusion detection system based on ABC-AFS algorithm for misuse and anomaly detection. *Computer Networks*, 136:37–50, 2018.
- [110] X. Wen-bo. Anomaly detection approach based on quantum-behaved partial swarm optimization. *Computer Engineering and Applications*, 2007.
- [111] S. Kalaivani and G. Ganapathy. Bacterial foraging optimization for enhancing the security in intrusion detection system. *International Journal of Engineering Research and Technology*, 8(10), 2019.
- [112] C. O. Sakar and O. Kursun. A hybrid method for feature selection based on mutual information and canonical correlation analysis. In *2010 20th International Conference on Pattern Recognition*, pages 4360–4363, 2010.
- [113] S. W. Na, S. K. Choi, T. W. Lee, and Y. H. Cho. Clustering algorithm for efficient energy consumption in wireless sensor networks. *Journal of the Korea Society of Computer and Information*, 19(6):49–59, 2014.
- [114] A. Khraisat, I. Gondal, P. Vamplew, and J. Kamruzzaman. Survey of intrusion detection systems: Techniques, datasets and challenges. *Cyber-security*, 2(1):1–22, 2019.
- [115] M. A. Ferrag, L. Maglaras, A. Ahmim, M. Derdour, and H. Janicke. RDTIDS: Rules and decision tree-based intrusion detection system for Internet-of-Things networks. *Future internet*, 12(3):44, 2020.
- [116] J. E. Gaffney and J. W. Ulvila. Evaluation of Intrusion Detectors: A decision theory approach. In *Proceedings 2001 IEEE Symposium On Security And Privacy*, S P 2001, pages 50–61, 2001.

- [117] P. A. R. Kumar and S. Selvakumar. Distributed denial of service attack detection using an ensemble of neural classifier. *Computer Communications*, 34(11):1328–1341, 2011.
- [118] B. G. Atli, Y. Miche, and A. Jung. Network intrusion detection using flow statistics. In *2018 IEEE Statistical Signal Processing Workshop (SSP)*, pages 70–74, 2018.
- [119] X. Xu and X. Wang. An adaptive network intrusion detection method based on PCA and support vector machines. In *ADMA'05 Proceedings of the First international conference on Advanced Data Mining and Applications*, pages 696–703, 2005.
- [120] M. Xiao and D. Xiao. Alert verification based on attack classification in collaborative intrusion detection. In *Eighth ACIS International Conference on Software Engineering, Artificial Intelligence, Networking, and Parallel/Distributed Computing (SNPD 2007)*, volume 2, pages 739–744, 2007.
- [121] T. Pietraszek and A. Tanner. Data mining and machine learning-Towards reducing false positives in intrusion detection. *Information Security Technical Report*, 10(3):169–183, 2005.
- [122] S. Raza, L. Wallgren, and T. Voigt. SVELTE: Real-time intrusion detection in the Internet of Things. In *Ad Hoc Networks archive*, volume 11, pages 2661–2674, 2013.
- [123] H. Cavusoglu, B. Mishra, and S. Raghunathan. The value of intrusion detection systems in information technology security architecture. *Information Systems Research*, 16(1):28–46, 2005.
- [124] Y. K. Penya, P. G. Bringas, and A. Zabala. Advanced fault prediction in high-precision foundry production. In *2008 6th IEEE International Conference on Industrial Informatics*, pages 1672–1677, 2008.
- [125] J. Wang, D. Fangand Z. Yang, H. Jiang, X. Chen, T. Xing, and L. Cai. E-HIPA: An energy-efficient framework for high-precision multi-target-adaptive device-free localization. *IEEE Transactions on Mobile Computing*, 16(3):716–729, 2016.
- [126] D. Yu and D. Frincke. Alert confidence fusion in intrusion detection systems with extended dempster-shafer theory. In *Proceedings of the 43rd annual Southeast regional conference - Volume 2*, pages 142–147, 2005.
- [127] G. Shan-qing, Y. Xue-lin, X. Li, and G. Cong. Survey of the security alerts correlation algorithms. *Computer Engineering*, 2005.
- [128] J. Vykopal. A flow-level taxonomy and prevalence of brute force attacks. In *International Conference on Advances in Computing and Communications*, pages 666–675, 2011.
- [129] Chang Li and Xiaofeng Liao. The impact of hybrid quarantine strategies and delay factor on viral prevalence in computer networks. *Mathematical Modelling of Natural Phenomena*, 11(4):105–119, 2016.
- [130] I. Ullah and Q. H. Mahmoud. A two-level hybrid model for anomalous activity detection in IoT networks. In *2019 16th IEEE Annual Consumer Communications & Networking Conference (CCNC)*, pages 1–6, 2019.
- [131] Y. Zeng, H. Gu, W. Wei, and Y. Guo. Deep-Full-Range : A deep learning based network encrypted traffic classification and intrusion detection framework. *IEEE Access*, 7:45182–45190, 2019.

...